


# BSP 200

**BLACK  
EDITION**

Solar Panel | 200 W | 18 V | Back Contact Technology

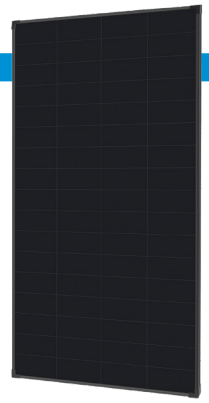


## Electrical Specifications

Rated power	200 W
Rated voltage (U <sub>mp</sub> )	18 V
Rated current (I <sub>mp</sub> )	11,1 A
Open-circuit voltage (U <sub>oc</sub> )	21,6 V
Short-circuit current (I <sub>sc</sub> )	10,8 A
Efficiency	24,5 %
Max. system voltage	1000 V

## Dimensions

Temperature range	-10 bis +85 °C
Solar cells	Monocrystalline
Number of cells	68
Dimensions	1410 × 700 × 30 mm
Weight	10,5 kg
Protection class	IP65
Cell connection	Back contact
Cable length	900 mm
Connectors	MC4

## Dimensions

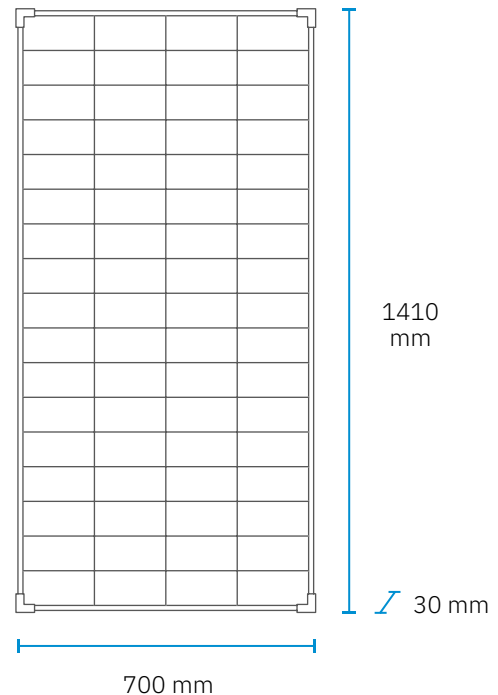

## Warranty

**25 YEARS  
WARRANTY**

### Our ECTIVE manufacturer's warranty:

At least 80% of rated output after 25 years.

## Back Contact Technology

In ECTIVE BSP Black back-contact panels, all electrical contacts are located on the rear side of the solar cells, which allows for virtually uninterrupted light absorption on the front side. This reduces shading of the cell surfaces and minimizes electrical resistance, resulting in particularly high efficiency, even in diffuse light or partial shade.

- Higher surface efficiency compared to conventional monocrystalline cells
- Increased performance in (partial) shading of the solar module
- Reduced hotspot formation
- Protected against dust and jets of water (IP65)